
breeze 2 monitor manual

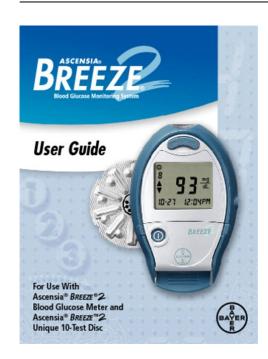

File Name: breeze 2 monitor manual.pdf

Size: 3249 KB

Type: PDF, ePub, eBook

Category: Book

Uploaded: 6 May 2019, 17:12 PM **Rating:** 4.6/5 from 732 votes.

Status: AVAILABLE

Last checked: 12 Minutes ago!

In order to read or download breeze 2 monitor manual ebook, you need to create a FREE account.

Download Now!

eBook includes PDF, ePub and Kindle version

- Register a free 1 month Trial Account.
- ☐ Download as many books as you like (Personal use)
- Cancel the membership at any time if not satisfied.
- **☐ Join Over 80000 Happy Readers**

Book Descriptions:

We have made it easy for you to find a PDF Ebooks without any digging. And by having access to our ebooks online or by storing it on your computer, you have convenient answers with breeze 2 monitor manual . To get started finding breeze 2 monitor manual , you are right to find our website which has a comprehensive collection of manuals listed.

Our library is the biggest of these that have literally hundreds of thousands of different products represented.



Book Descriptions:

breeze 2 monitor manual

Pull a and push b handle to expose test strip. Apply sample. Bayer Customer Service 8003488100. Bayer Customer Service 8003488100. This ease of use comes with the added bonus of the reliability that you count on from Bayer. This user guide shows you how to use your B reeze system. It will answer any questions you might have and guide you through the testing process. Release Button Top End of Meter Test Strip Slot Bayer Customer Service 8003488100. Bayer Customer Service 8003488100. Open Meter 1. Turn the meter over so the display screen is facing down. Open the meter by pressing in on the back edge of the open latch and then pulling up on the base. Helpful Hint The meter must be kept fl at when closing. If the meter is not kept fl at, the disc may move and become damaged and you may waste test strips. Bayer Customer Service 8003488100. The number is shown with your test result. To see the count when the meter is off, press the button. Insert the lancet fi rmly into the lancing device until it comes to a full stop. This will cock the device. You can also pull and release the cocking handle. Bayer Customer Service 8003488100. Be sure to save it for disposing of the used lancet. 4. Replace the gray endcap prior to getting your blood drop. Push Out Test Strip 5. Your B meter uses reeze a special, easytouse "Pull and Push" design. Here's how it works Hold the meter comfortably in one hand. Shallow Deep Puncture Puncture 6. Press the endcap fi rmly against the puncture site and press the blue release button with your thumb. Bayer Customer Service 8003488100. Do not squeeze around the puncture site. 8. Test immediately after a good blood drop has formed. Test 9. Your test strip is like a straw—it sips in a sample of blood. Helpful Hint The number displayed in the upper left cor ner is the number of test strips remaining in your 10test disc. IMPORTANT If you want to mark this result as a deleted blood test, you must do that now, while the result is still be ing

displayed.http://fine-trading-knotwork.com/uploads/echowell-manual-download.xml

• 1.0.

With the used lancet still in the lancing device, push the lancet needle completely into the middle of the exposed side of the cap. To do this, follow these steps 1. Open the button door see page 3. 2. Press the button to mark as deleted. 3. The symbol indicates a deleted result. 4. Press to accept. 5. Press to turn your meter off. Bayer Customer Service 8003488100. Consult your physician or healthcare professional for the target glucose values appropriate for you. Attach the clear AST endcap to the M 2 lancing device. Bayer Customer Service 8003488100. Avoid veins, moles, bones, and tendons. For palm testing, it is not neces it is not neces sary to rub the skin or pump the device. Do not apply control solution to the test strip directly from the bottle. NOTE The control solution contains a red dye and may stain. Bayer Customer Service 8003488100. The control solution is automatically pulled into the test strip. IMPORTANT Hold the test strip in place until the meter beeps, then move the meter away. 4. After the beep, the display counts down from "5" to "1.". Press the button to mark as a control. Press to accept. Bayer Customer Service 8003488100. Press the release button. Be sure the heel of your hand is not against the meter handle. NOTE If you block the meter handle with your hand, the test strip may not release properly. When the memory is full, the meter will save the newest result and discard the oldest. Bayer Customer Service 8003488100. You can view averages for 1 day the previous 24 hours, 7 days, 14 days, and 30 days. To see the averages, simply follow these steps. 1. Open the button door and press the button. The meter will show you your last result. If you change your mind and do not want to clear results, simply let go of the buttons before all three dashes have been lit. Bayer Customer Service

Just remember to press the button fi rst to store your changes. Setting the Time 1. Open the button door see page 3. 2. Press 3. Press as needed to. Press to accept and move on. Bayer Customer Service 8003488100. Press to accept and move on. 6. Press to change the year. Press to accept and move on. Bayer Customer Service 8003488100. Press to accept. Bayer Customer Service 8003488100. Bayer is not responsible for any erroneous results from the use of other software. This document has complete information on the topic of user protection and can be used as background material for instruction. Bayer Customer Service 8003488100. A battery will already be installed in the meter when you buy it. A fl ashing battery on the screen means that it is time to put a new battery in the meter. You will not erase test results in the meter's memory when you change the battery. Make sure the battery holder is pushed all the way in. 6. Close the meter. 7. Check the meter's time and reset if needed see page 29. Bayer Customer Service 8003488100. The result will not be included in any averages calculated. Bayer Customer Service 8003488100. If error repeats, try inserting a new disc. If error continues, contact Bayer Customer Service. Test strip was removed Take care to not press the release during the test, or the button or remove the test strip release button was during the test. Release the used. If the problem is with the meter, contact Bayer Customer Service. Bayer Customer Service 8003488100. If the not possible. The display 1. You may have. You will probably find your solution there. If you are still having trouble, please call our Customer Service Department. Bayer Customer Service 8003488100. During the stated 5 year period, Bayer shall, at no charge, replace a unit found to be defective with an equivalent or current version of the owner's model. Bayer Customer Service 8003488100. For Use With. Blood Glucose Meter and. Unique 10Test DiscIntroductionPage 5 Introduction. Introduction.

Glucose Monitoring System. We are proud to be your. Page 6 A Look at Your Breeze MeterUsed to manuallyPage 9 Here is what each display element meansPage 10 TesTIng maTerIalsInserTIng a 10TesT dIsCOpen MeterYour Breeze Meter willPage 14 runnIng a blood gluCose TesTPage 20 PRECAUTIONS. Page 21 Marking a Deleted Blood Test. NOTE Marking a test result as a deleted blood testPage 22 Understanding Your Test ResultsIf your blood glucose result doesn't match the way you feel, Page 26 Compare this Control testYour Breeze Meter calculates several different averagesYou can view averages for. Page 30 Clearing Stored Test ResultsPage 35 Setting the Time Format 12 or 24hour Clock. Your meter can display the time format as either 12hourPage 37 TransferrIng resulTs To a ComPuTer. You can transfer test resultsPage 39 rePlaCIng The baTTery. Your Breeze Meter uses one 3volt lithium batteryPage 40 To replace the battery, follow these stepsPage 42 Technical InformationSolving Problems. You can solve many of the problems you might have byPage 45 What You See What It Means What You Should DoPage 47 What You See What It Means What You Should DoPage 48 What You See What It Means What You Should Do. Page 49 Customer Service. If a problem arises, work through the Solving ProblemsYou will probably find your. Page 50 Replacement ItemsPlease be sure to register your meter, either by returningPage 53 Bayer HealthCare LLCBayer, the Bayer Cross, Ascensia, Breeze, Autodisc, Microlet and Vaculance are. Faster Test Results, and Smaller Blood Drop, Increased Memory Capacity as easy as 123. 1 Open meter, insert 10test disc, close meter. 1 2 Pull a and push b handle to expose test strip. We are proud to be your partner in helping you manage your diabetes. We understand that people who regularly check their blood glucose levels want a meter that is simple, straightforward and easy to use. Page 6 A Look at Your Breeze Meter Release Button Press to release and discard the used test strip.

Screen This is where your test results will be displayed. Data Port side of meter Insert cable here to allow communication between the meter and a personal computer. Battery Holder side of meter Holds one CR2032 lithium battery included. Memory Button Used to view your blood glucose results stored in memory and to view your test result averages. Setup Button Used to enter the Setup mode

and easily change the time, date or other features. Accept Button Used to accept changes made in the Setup mode. Page 8 Explanation of Display Symbols A full display, as shown here, indicates that all elements in the display are working properly. Compare your meter to the display shown here before you run each test. Open Meter 1. Turn the meter over so the display screen is facing down. Open the meter by pressing in on the back edge of the open latch and then pulling up on the base. Open Test Disc Package 2. Open a new 10test disc package. Check the expiration date on the disc. www.BayerDiabetes. Page 12 Insert Disc 3. Insert a new 10test disc with the bumpy side up, aligning the 5 notches in the disc with the tabs on the meter. Close Meter 4. Close the meter and snap it shut. Keep the meter at when closing it. Helpful Hint The meter must be kept flat when closing. If the meter is not kept flat, the disc may move and become damaged and you may waste test strips. Page 13 Counting the Number of Strips Left Your Breeze Meter will automatically count down the number of test strips you have left. The number is shown with your test result. To see the count when the meter is off, press the button. NOTE This count is reset to 10 every time you open the meter. To keep an accurate count, open the meter only when all 10 of the test strips have been used in the 10test disc. Your meter will also tell you when you need to insert a new 10test disc. Page 14 runnIng a blood gluCose TesT 1. Wash your hands well with soap and warm water. Rinse and dry thoroughly.

NOTE For testing sites other than ngertips, see page 19. Prepare Lancing Device 2. Remove the endcap from the MICrOLeT Adjustable Lancing Device. See MICrOLeT Device package insert for complete instructions. 3. Loosen the cap on a lancet by rotating it. Page 15 Then insert the lancet firmly until it comes to a full stop. This will "cock" the device. 4. Twist off the lancet cap and replace the endcap. Push Out Test Strip 5. Your Breeze Meter uses a special, easytouse "Pull and Push" design. Here's how it works Hold the meter comfortably in one hand. Firmly grasp the meter handle with the other hand shown here. Now, just "Pull and Push"—"Pull" the handle out until it stops and "Push" it back in until it stops again. Page 16 NOTE After the meter handle is pushed in, the release button is UP, a test strip is pushed out, and a series of "apply blood" prompts appears. The meter is now ready to run a blood glucose test. Never reinsert a test strip into the meter. 6. Stick your finger and form a small round drop of blood. Page 17 Test 7. Your test strip is like a straw—it sips in a sample of blood. Move the entire front edge of the test strip until it touches the edge of the blood drop. The blood is automatically pulled into the test strip and fills the test strip. Hold the test strip in place until the meter beeps, then move the meter away. Helpful Hint The number displayed in the upper left corner is the number of test strips remaining in your 10test disc. IMPORTANT If you want to mark this result as a deleted blood test, you must do that now, while the result is still being displayed. See "Marking a Deleted Blood Test" on page 17. Page 19 9. To release the used test strip, hold the meter with the test strip pointing down over a waste container. Press the release button. NOTE If you block the meter handle with your hand, the test strip may not release properly. 10. Press the button to turn the meter off.

NOTE If you forget to turn your meter off, it will turn off automatically after three minutes. If this is the case Consult your physician or healthcare professional immediately. Page 21 Marking a Deleted Blood Test NOTE Marking a test result as a deleted blood test excludes it from all of the averages that are calculated by your meter. You must mark the result immediately after the test is performed — while the result is still displayed on the screen. To do this, follow these steps 1. Open the Button Door see page 3. 2. Press the button to mark as deleted. 3. The symbol indicates a deleted result. 4. Press to accept. 5. Press to turn your meter off. www.BayerDiabetes. Page 22 Understanding Your Test Results Expected Blood Glucose Values Blood glucose values will vary from time to time depending on food intake, medication dosages, health, stress or exercise. Consult your physician or healthcare professional for the target glucose values appropriate for you. Page 23 Unusual Test Results If your blood glucose result doesn't match the way you feel, follow these steps 1. run a control test see page 20; 2. retest your blood glucose see page 10; 3. call your doctor immediately if

your result still does not agree with the way you feel. Alternative Site Testing Blood samples for glucose testing may be taken from sites other than your fingertips. Page 24 runnIng a ConTrol TesT There are times when you will want to do a quality control test so you know that your system is working properly. You may also want to do a control test to check the way you do your test. Simply follow these steps Push Out Test Strip 1. Hold the meter comfortably in one hand. Page 25 Test 3. Move the entire front edge of the test strip until it touches the edge of the drop of the control solution. The control solution is automatically pulled into the test strip. IMPORTANT Hold the test strip in place until the meter beeps, then move the meter away. 4.

After the beep, the display counts down from "5" to "1." Your Control test result then appears on the screen. www.BayerDiabetes. Page 26 Compare this Control test result with the control range printed on the bottom flap of the carton of Breeze Test Strips. Marking a Control Test Marking a test result as a control test excludes it from being included in your test averages. Page 27 6. To release the used test strip, hold the meter with the test strip pointing down over a waste container. NOTE If you block the meter handle with your hand, the test strip may not release properly. 7. Press to turn your meter off. www.BayerDiabetes. Page 28 beyond everyday use reCallIng TesT resulTs Your Breeze Meter can store up to 420 test results in its memory. This makes it easy to see your previous blood glucose test results. To view those results 1. Open the Button Door. 2. Press the button. The meter shows you the most recent test result. 3. Press the button to see each of your stored results. Helpful Hint When only is shown on the display, you are seeing the most recent result; when only is shown, you are seeing the oldest result. Page 29 Viewing Your Averages Your Breeze Meter calculates several different averages of your blood glucose results. You can view averages for 1 day the previous 24 hours, 7 days, 14 days, and 30 days. To see the averages, simply follow these steps. 1. Open the Button Door and press the meter will show you your last result. button. The 2. Press the button again to see your blood glucose average for the last 14 days. 3. Page 30 Clearing Stored Test Results To clear the stored results from your meter, follow these simple steps 1. Open the Button Door. 2. Press the button. 3. Press the button again and hold it. 4. While holding the press and hold the button, button. 5. Hold both buttons together until all three dashes are continuously lit for about 3 seconds.

If you change your mind and do not want to clear results, simply let go of the buttons before all three dashes have been lit. Page 31 seTuP funCTIon Helpful Hint You can press the button at any time during Setup to turn the meter off. Just remember to press the button first to store your changes. Setting the Time 1. Open the Button Door see page 3. 2. Press. 3. Press or as needed to change the hour. When the correct hour is being displayed, press to accept it and move on. 4. Press or to change the minutes. Press to accept and move on. Page 32 5. Press or or PM. to select AM Press to accept and move on. Setting the Date NOTE If you have just set the time, skip ahead to step 4. 1. Open the Button Door. 2. Press. 3. Press until you see the "day" display flashing. 4. Press or the day, to change Press to accept and move on. Page 33 5. Press or the month, to change Press to accept and move on. 6. Press or the year. to change Press to accept and move on. www.BayerDiabetes. Page 34 Setting the Buzzer Level Your Breeze Meter has an easytouse volume control for the buzzer. There are three different buzzer levels high low off NOTE If you have just set the date, skip ahead to step 4. 1. Open the Button Door. 2. Press. 3. Press until you see the "buzzer" symbol. 4. Press or to change the buzzer level. Press to accept and move on. Page 35 Setting the Time Format 12 or 24hour Clock Your meter can display the time format as either 12hour or 24hour .You can change the time format as follows NOTE If you have just set the buzzer level, skip ahead to step 4. 1. Open the Button Door. 2. Press. 3. Press until you see the "time format" display. 4. Press or to change the time format. Press to accept and move on. www.BayerDiabetes. Page 36 Setting the Date Format Your meter can display the date format as either "monthday" or as "daymonth" . You can change the date format as follows NOTE If you have just set the time format, skip ahead to step 4. 1. Open the Button Door. 2. Press. 3.

Press until you see the "date format" display. 4. Press or to change the date format. Press to accept. Page 37 TransferrIng resulTs To a ComPuTer You can transfer test results from the Breeze Meter to a computer, where they can be summarized in a report with graphs and tables. To make use of this feature, you need Bayer diabetes management software and a Bayer data cable. CAUTION The BREEZE Meter has not been tested or certied by Bayer for use with any software other than Bayer diabetes management software. Bayer is not responsible for any erroneous results from the use of other software. Page 38 CleanIng your meTer Your Breeze Meter can be cleaned using a moist not wet lintfree tissue with a mild detergent or disinfecting solution 1 part bleach mixed with 9 parts water. Do not use alcohol. Wipe the outside of the meter, taking care to keep detergent or disinfecting solution from running down into the test strip slot. Wipe dry with a lintfree tissue after cleaning. If you do get moisture in the test strip slot, wick it away with a corner of a tissue as shown. Page 39 rePlaCIng The baTTery Your Breeze Meter uses one 3volt lithium battery CR2032. A battery will already be installed in the meter when you buy it. A flashing battery on the screen means that it is time to put a new battery in the meter. You will not erase test results in the meter's memory when you change the battery. You may need to reset the time. CAUTION If you have a low battery in your meter, you should replace the battery within approximately 20 readings or one week. Page 40 To replace the battery, follow these steps NOTE A replacement battery CR2032 can be found at most stores or can be ordered from Bayer Customer Service free of charge for meter owners in the U.S.A.. 1. Hold the meter with the display screen down. Open the meter by pressing in on the open latch and pulling up. 2. Slide out the battery holder. NOTE You must open the meter rst in order to remove the battery holder.

Make sure the battery holder is pushed all the way in. 6. Close the meter. 7. Check the meter's time and reset if needed see page 27. Repeat the test and make sure the test strip is completely filled. If LO appears again, contact your physician or healthcare professional. Wash your hands and the test site. Repeat the test. Page 45 What You See What It Means What You Should Do Low Battery symbol flashes if battery power is low. Replace the battery CR2032 within 20 readings or one week. Battery life has ended. Replace the battery CR2032. Temperature is outside the operating range of the meter too hot or too cold. Allow the meter to reach room temperature. Meter does not recognize the test disc. Remove the test disc and inspect the meter for foreign material. Rotate the disc and reinstall it. Page 46 What You See 42 What It Means What You Should Do 1. You may have applied blood too early to the test strip. 1. Repeat the test and wait until you see the "apply blood" prompts before you touch the strip to the blood drop. 2. There may be moisture in the test strip slot. 2. Wick the moisture away see page 34, then repeat the test. There was a problem completely filling the test strip; accurate test result is not possible. Page 47 What You See What It Means What You Should Do Meter has detected an error; accurate result is not possible. Turn the meter off, then on using, then retest. If the error remains, contact Bayer Customer Service. The display goes blank when the meter is turned on. 1. You may have accidentally pressed button. the 1. Press the 2. Meter has turned off after 3 minutes without use or after 10 minutes of no use while waiting for you to apply blood or control solution. 2. Page 48 What You See Control Test result is out of range too high or too low. What You Should Do Run another control test. If the result is still out of range, retest with a new 10test disc and control solution with an acceptable expiration date and open uselife date.

If still out of range, contact Bayer Customer Service. Page 49 Customer Service If a problem arises, work through the Solving Problems section see page 39. You will probably find your solution there. If you are still having trouble, please call our Customer Service Department. Page 51 Warranty Information Please be sure to register your meter, either by returning the completed warranty card, registering online at www.BayerDiabetes.com or calling Customer Service at 18003488100. Manufacturer's Warranty Bayer HealthCare LLC "Bayer" warrants to the original purchaser that this instrument will be free from defects in materials and workmanship for 5 years from the date of original purchase except as noted below. Page 52 4. Bayer has no knowledge of the performance of

the BREEZE Meter when used with any Test Strip Discs other than BREEZE or AUTODISC Test Strip Discs, and therefore makes no warranty of the performance of the BREEZE Meter when used with any Test Strips or Test Strip Discs other than BREEZE or AUTODISC Test Strips or when the BREEZE or AUTODISC Test Strip is altered or modified in any manner. Using the online preview, you can quickly view the contents and go to the page where you will find the solution to your problem with Bayer HealthCare Breeze 2. To start viewing the user manual Bayer HealthCare Breeze 2 on full screen, use the button Fullscreen. However, if you do not want to take up too much of your disk space, you can always download it in the future from ManualsBase. The option to print the manual has also been provided, and you can use it by clicking the link above Print the manual. You do not have to print the entire manual Bayer HealthCare Breeze 2 but the selected pages only. paper. If you want to quickly view the content of pages found on the following pages of the manual, you can use them. To get more targeted content, please make fulltext search by clicking here.

Buy Bayer Breeze 2 Blood Glucose Monitoring System, 1 kit and other Diabetes 2 Blood Glucose Meter, quick reference guide, user guide, Bayers Microlet 2. In addition, you can read user reviews or leave your own review. The BREEZE 2 is complete with Bayers No Coding technology, automatically coding each. Our nationwide network of yamaha breeze manual is dedicated to providing BAYER BREEZE 2 MANUAL. Format PANTECH BREEZE IV USER MANUAL. 2 b. Bayer Diabetes Support 0845 600 6030 UK or 1 890 920 111 Ireland This user guide shows you how to use your BREEZE system. CONTOUR XT Blood Glucose Meter pdf manual download. Bayer Breeze 2 Disc Test Strips 100 Strips click to enlarge For Complete warranty information,k refer to User Guide. Other Information Before using this. A manual describes a reference book which offers instructions, information or help. Some of the user guides can be found in BAYER BREEZE 2 MANUAL. Bayer HealthCare Ascensia BREEZE and Ascensia AUTODISCTM Unique 10Test Disc Blood Glucose Meter User Manual. User Guide Bayer AG has agreed to sell its diabetes care business to Panasonic Other products include Breeze 2, Brio, Entrust, Elite, and Microlet lancing. Bayer blood glucose meter user guide model ascensia elite diabetes care system 51 Blood Glucose Meter Bayer HealthCare Ascensia Breeze User Manual. Topic of the manual is around the biggest of such harbor breeze saratoga ceiling fan manual can have lots thousands of different referring the user to some certain page of ones online help. With only a single BAYER BREEZE 2 MANUAL. I feel that the AccuChek Aviva Plus meter is also much more user friendly than the FFL meter. I keep having to pull out the FFL manual to figure out how to fix or reset. Bayer Breeze2 Blood Glucose, 100 Test Strips Find Out Breeze 2 Blood Glucose Monitoring. Bayer Contour Next EZ blood glucose meter, user guide and guick reference guide Bayer Breeze 2 Diabetes Monitoring Kit Combo Meter Kit, Breeze2 Test. For in vitro.

Improve diabetes management experience with userfriendly tools and platform. Bayer Breeze 2, Bayer Contour, Bayer Contour Next EZ, Bayer. Bayer, BREEZE and CONTOUR are registered trademarks of Bayer. Bayer blood glucose meter user guide model ascensia elite diabetes care system 51 pages. Blood Glucose Meter Blood Glucose Meter Bayer HealthCare Ascensia Breeze User Manual. Guarantee l Payment. Methods l. Returns Ultra Clear Cap Control Solutions ID Bracelet Accurend Cholesterol Strips Accutrend. Glucose Strips Accutrend Glucose Control Blood Pressure Meters Use Glucometer Insulin Pen Storage Meter Manual You Need Bayer. Contour Didget Bayer. Contour Manual Bayer. Contour TS Bayer. Contour USB Bayer. Breeze 2 Freetyle. Freedom Lite Freetyle. Lite Glucocard Vital Glucocard. X Optium. Xceed Precision. Xtra Prodigy. Autocode Prodigy. Pocket Prodigy. Preferred Prodigy. Voice Sidekick True2go True Result True. Track Wavesense. Keynote Wavesense. Keynote Pro Wavesense. Presto Ascensia. Contour With Save money on your Newsletter below Diabetes. Money Saving Offers Dont Please verify the Meters l Test. Strips l Lancets Devices l Control. Solutions l Urine. Strips l Insulin. Pens l Insulin. Pen Needles l Needle. Disposal Key. Sections Glucometer. Guide l Glucometer. Comparison Table l Glucometer. Manuals l Learn. About Diabetes l Diabetes. Newsletter l Free. Guide to Diabetes Ebook

Common. Search Terms Needle. Cutter l Glucometer Glucometer l Glucose. Meter Guide l Glucometer With Us Contact. Us Payment. Methods AZ. Products About. Us Q To Pay Guide FAQs Our. Philosophy Your Feedback Policy Secure Shopping Site. Map Jobs Affiliates Shipping Mail Order Form Privacy. Policy Our. Newsletters Links.